

BOX PATENT APPLICATION  
ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR(S): FABIAN, Frank

FOR: LOUDSPEAKER

Enclosed are:

☒ 8 sheet(s) of ☒ formal or ☐ informal drawings.

☒ An assignment of the invention to: The Canadian Loudspeaker Corporation

☒ A verified statement to establish small entity status under 37 C.F.R. 1.9 and 37 C.F.R. 1.27.

☒ Information Disclosure Statement.

☒ Executed (☐ Un-executed) Declaration and Power of Attorney.

☐ Other: \_\_\_\_\_

☒ The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	No. Filed	No. Extra
BASIC FEE		
TOTAL CLAIMS	47 -20=	27
INDEPENDENT CLAIMS	5 -3=	2
MULTIPLE DEPENDENT CLAIMS PRESENTED		

If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$380
x9	\$243
x39	\$78
+130	\$
TOTAL	\$701.00

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$760
x18	\$
x78	\$
+260	\$
TOTAL	

☐ Please charge Deposit Account No. 02-2553 in the amount of \$ \_\_\_\_\_.

☒ A check in the amount of **\$741.00** to cover the filing fee of **\$701.00** and the recordal of an Assignment of **\$40.00** is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 02-2553.

Any additional fees required under 37 C.F.R. § 1.16

Any patent application processing fees under 37 C.F.R. § 1.17

☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 02-2553.

Any patent application processing fees under 37 C.F.R. § 1.17.

Any filing fees under 37 C.F.R. § 1.16 for presentation of extra claims.

BLAKE, CASSELS & GRAYDON

Date: April 28, 1999

By: [Signature]

Registration No. 40,460

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(b)) — INDEPENDENT INVENTOR

Applicant or Patentee: Frank W. Fabian  
Attorney's Docket No.: 57472/3  
Serial or Patent No.: \_\_\_\_\_  
Filed or Issued: Filed Contemporaneously Herewith  
Invention: LOUDSPEAKER

As the below named inventor, I hereby declare that I qualify as independent inventor as defined in 37 CFR 1.9(c) for the purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled LOUDSPEAKER described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as a small business concern under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☐ No such person, concern, or organization exists.  
☒ Each person, concern or organization listed below.  
The Canadian Loudspeaker Corporation  
1578 Eglinton Avenue West, Toronto, Ontario, M6E 2G8, Canada

Separate verified statements are required from each named person, concerns or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Frank W. FABIAN  
NAME OF INVENTOR  
[Signature]  
SIGNATURE OF INVENTOR  
APR 16 27, 1999  
DATE

NAME OF INVENTOR  
SIGNATURE OF INVENTOR  
DATE

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c)) — SMALL BUSINESS CONCERN

Applicant or Patentee: Frank W. FABIAN  
Attorney's Docket No.: 57472/3  
Serial or Patent No.: \_\_\_\_\_  
Filed or Issued: \_\_\_\_\_  
Title: LOUDSPEAKER

I hereby declare that I am:

- ☒ the owner of the small business concern identified below.  
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF SMALL BUSINESS CONCERN: THE CANADIAN LOUDSPEAKER CORPORATION  
1578 Eglinton Ave. W., Toronto, Ontario, M6E 2G8, Canada

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).


Each person, concern or organization having any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.  
☐ Each person, concern or organization is listed below.

Separate verified statements are required from each named person, concerns or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Frank W. FABIAN  
TITLE OF PERSON IF OTHER THAN OWNER: President  
ADDRESS OF PERSON SIGNING: 309 Robina Avenue, Toronto, Ontario, Canada M6C 3Z2  
SIGNATURE: 

**APPLICATION FOR UNITED STATES LETTERS PATENT**

**LOUDSPEAKER**

**TO ALL WHOM IT MAY CONCERN:**

**BE IT KNOWN THAT I,**

Frank William Fabian, a Canadian citizen

having an address at 309 Robina Avenue, Toronto, Ontario, Canada, M6C 3Z2

have invented a: **LOUDSPEAKER**

of which the following is a specification.

## LOUDSPEAKER

### Field of Invention

This invention relates generally to the field of loud speakers.

### Background Art

5 A typical loudspeaker assembly for low to mid-range audible sound reproduction, that is, a bass speaker, or a "woofer", has a magnetic sandwich assembly. The core of the sandwich is typically, an annular magnet, although square or rectangular open center magnets are also known. A backplate, typically circular, is mounted to one annular face of the magnet, and has an outside diameter similar to, the  
10 outside diameter of the annular magnet. An annular top plate is mounted to the other face of the magnet. The top plate has an outside diameter similar to the backplate, and an inside diameter less than the inner diameter of the annular magnet. The magnet, the backplate, and the top plate are concentrically mounted about a central axis perpendicular to the annular magnet. The polarity of the magnet is such that the  
15 annular top and bottom faces are opposite poles.

In general, the magnet sandwich assembly has a central post, sometimes called a pole piece, a T-yoke, or a core. The pole piece is mounted along the central axis of the magnetic assembly to extend from the backplate toward the top plate. The end of the pole-piece standing furthest away from the backplate usually sits adjacent the  
20 inner annular edge or face of the top plate. A small radial gap is left between the top plate and the end of the pole piece. Inasmuch as the top plate, the backplate, and the pole-piece are typically made of ferromagnetic materials, or materials of high magnetic permeability, a magnetic flux field is established by the magnet across the small gap. Thus the magnetic flux path lies completely in materials of relatively high  
25 magnetic permeability except for the gas, typically air, in the gap between the inner edge of the annular member and the central post.

A voice coil is suspended to ride in the small gap, which is the location of maximum magnetic flux density. The voice coil can reciprocate linearly relative to the pole piece, and, in so doing, the turns of the coil traverse the field of the magnet.  
30 The voice coil is suspended from a resilient suspension, usually in the form of a moving diaphragm assembly mounted on springs. The diaphragm assembly usually has a membrane element that has the shape of a truncated section of a cone, with a dust cap membrane extending across a narrower part of the section. The lead wires

for the coil are usually, though not always, mounted to the cone, typically with glue, and the cone and the voice coil are constrained to move together.

Loudspeaker performance reflects design compromises in the desired power output, the choice of magnet, the choice of coil, the nature of the resilient mounting, the entrapment of air in the assembly, and the size and shape of the cabinetry placed about the loudspeaker itself. A loudspeaker will tend to have a chosen desired operating bandwidth. In general, when operated outside the design bandwidth the speaker is more likely to exhibit non-linear performance, and more likely to exhibit undesirable, or less than optimal, impedance characteristics, and may tend to be more prone to failure.

In operation, the varying electrical current in the voice coil will tend to cause the voice coil to become warm. The heating of the coil is known, and one design consideration is the anticipated operating temperature. When the coil becomes warm, the adjacent metal structure also becomes warm, though generally to a lesser degree. The electrical resistance of copper wire increases with increasing temperature. Inasmuch as the power output of a speaker varies inversely as the resistance of the voice coil, an increase in the temperature of the coil will tend to reduce the current in the coil, and reduce the output power. As a consequence, it is advantageous to keep the voice coil relatively cool, if possible. If the coil is operated too vigorously, its performance will deteriorate, and may ultimately fail. Voice coils of aluminium wire are less likely than copper coils to have a general rise in impedance with increasing power, but also have a tendency to fail with increasing temperature.

In the past, a common solution to the problem of increased resistance due to coil warming has been to choose a larger, heavier speaker to give a higher output power level. A larger voice coil, magnetic assembly, or both, will usually be capable of producing the same power output as a smaller one but with a lower temperature rise, and less deterioration in performance. To maintain the same specified ratio of output to losses,  $Q_{es}$ , and therefore  $Q_{ts}$ , it would be customary to increase both the size of the magnet and the size of the coil. It would be advantageous to reduce the operating temperature of the voice coil to permit a smaller motor, {that is, a coil and magnet assembly}, to be used at higher power levels, rather than having to adopt a bigger, heavier, and possibly more expensive, unit.

At present, it is not uncommon for the pole piece of a woofer to be hollow, and for the back plate to have a central opening. When the diaphragm moves, the air pocket beneath the dust cover membrane then has an outlet to ambient through the hollow pole piece and through the backplate, so pressure variation in the pocket is reduced. One attempt to use the motion of the air displaced by the dust cover dome to enhance cooling is shown in U.S. Patent 5,042,072 of Button, issued August 20, 1991. Button forms three peripheral grooves in the outer face of the pole piece. These channels vent through the backplate. The usually open hollow core of the pole-piece is blocked such that air is forced to move in or out through the three channels. Inasmuch as the radially outer portion of the channels is bounded by the inner face of the voice coil, Button indicates that portions of the voice coil are cooled by forcing air displaced by the dome through the channels next to the voice coil.

U.S. Patent 5,357,586 of Nordschow and Wright, issued October 18, 1994. It shows a speaker that has radial perforations in the voice coil former at a level above the voice coil. A vane, or aerodynamically shaped body, is mounted within the hollow core of the pole-piece. Air flows more easily past the aerodynamically shaped body in one direction than the other, such that reciprocation of the diaphragm will tend to cause a flow of air through the assembly between the perforations and the opening in the backplate, with a cooling effect.

U.S. Patent 5,497,428 of Rojas issued March 5, 1996. It shows a loudspeaker assembly with channels formed in the external periphery of the pole-piece adjacent to the voice coil. These channels vent into the hollow central core of the pole piece, which, as is customary, is open through the backplate to ambient. The top end of the pole piece is blocked by a generally conical part, such that the air is forced to flow through the channels.

Another noted phenomenon of existing loudspeakers in which the backplate of the speaker is a closed plate, is that the reciprocation of the diaphragm assembly, as in a closed back mid-range to high audible frequency unit, or tweeter, will tend to compress or expand, the air trapped within the loudspeaker casing itself. Where the entrapped volume is small, the effect can be quite pronounced. It is desirable in such instances to increase the internal trapped volume so that the volume displaced by operation of the speaker diaphragm is small relative to the trapped volume, with a consequent lessening of the pressure fluctuations in the entrapped gas. It will be

apparent that compression of the entrapped gas will tend to oppose the motion of the speaker, and may complicate it still more if there is a dynamic resonance problem. A known method of reducing the magnitude of this phenomenon is to provide a larger backshell or housing. This is generally not desirable because it increases the size of the loudspeaker unit for the purpose of enclosing air. It would be advantageous to increase the volume of the entrapped air without having to increase the physical size of the loudspeaker envelope.

U.S. Patent 5,335,287 of Athanas, issued August 2, 1994 relates to a loudspeaker employing a magnetic liquid suspension for locating the voice coil in the gap. According to Athanas, one problem of magnetic liquid voice coils is that the liquid has a tendency to be blown, or drawn, out of the magnetic gap. In Athanas' view this was because the oscillatory motion of the voice coil produces momentary changes in the atmosphere near the end of the pole piece, and in the annular chamber surrounding the pole piece. The loudspeaker shown by Athanas has not only a port through the back plate to vent the hollow core of the pole piece, but also additional vents formed through the backplate to vent the annular chamber formed between the pole piece and the magnet. This is thought to reduce the tendency of the air compressed in the annular chamber from pushing the liquid out of the gap.

#### Summary of the Invention

In one aspect of the invention there is a magnetically permeable plate for use as the front plate of a magnetic flux path assembly of a loudspeaker. The loudspeaker has a diaphragm driven by a voice coil. The magnetic flux assembly has a pole piece, a magnet, and a magnetic flux path between one pole of the magnet and the pole piece. The plate has an opening defined therein sized to fit about the pole piece and to co-operate with the pole piece to define a gap for accommodating movement of the voice coil therebetween. The top plate has venting defined therein to permit fluid communication through the plate external to the voice coil.

In an additional feature of that aspect of the invention the plate has an outer periphery, an inner periphery defining the opening, and the venting is segregated from the inner periphery. In another additional feature of that aspect of the invention the plate has the form of a disc in which the inner and outer peripheries are circular and concentric. In still another additional feature of that aspect of the invention the



venting includes an array of apertures spaced outwardly from, and having a pitch circle concentric with, the inner periphery. In a further additional feature of that aspect of the invention the apertures are circular. In a still further additional feature of that aspect of the invention the opening has a nominal periphery and the venting includes at least one rebate let into the nominal periphery. In a yet further additional feature of that aspect of the invention the opening has a crenellated profile.

In another aspect of the invention, there is a magnetic flux path assembly for a loudspeaker having a diaphragm, a voice coil for driving the diaphragm and a diaphragm dust cap cavity defined therewithin. The magnetic flux path assembly has a pole piece, an opposed member placed in spaced relationship from the pole piece to define a gap for accommodating reciprocation of the voice coil, and at least one intermediate member mounted to maintain the position of the pole piece and the opposed member relative to each other. The pole piece, the intermediate member, and the opposed member co-operate to form a continuous path of higher magnetic permeability than the gap. At least one of the pole piece, the at least one intermediate member, and the opposed member includes a magnet for establishing a magnetic flux in the magnetic flux path assembly and across the gap. The magnetic flux path assembly has an airflow path defined therein extending between the dust cap cavity and external ambient, for permitting displacement of air between the cavity and external ambient. At least a portion of the airflow path is defined in the opposed member external to the gap, whereby displacement of air by the dust cap member causes motion of air in the portion of the airflow path in the opposed member to encourage cooling of the opposed member.

In an additional feature of that aspect of the invention, the opposed member is a plate having an outer periphery. A closed inner periphery defines an opening extending about the pole piece. The gap lies between the periphery and the pole piece. A portion of the airflow path is formed in the plate and is segregated from the opening. In another additional feature of that aspect of the invention, the plate has the form of a disc in which the inner and outer peripheries are circular and concentric. In still another additional feature of that aspect of the invention, the portion of the airflow path formed in the plate includes an array of apertures spaced outwardly from, and having a pitch circle concentric with, the inner periphery.

In still yet another additional feature of that aspect of the invention, the opposed member is a plate having an outer periphery. A closed inner periphery defines an opening extending about the pole piece. The gap lies between the periphery and the pole piece. At least one portion of the inner periphery defines the gap, and another portion of the periphery defines the portion of the airflow path defined in the opposed member.

In a further additional feature of that aspect of the invention, the magnetic flux path assembly has an axis parallel to the direction of reciprocation of the voice coil. The pole piece has a distal region thereof distant from the rigid member. The distal region has the form of a body of revolution concentric with the axis. The opposed member is a plate having a closed inner periphery extending about the pole piece distal region. The inner periphery has at least one sector of a circular arc concentric with the distal region. The sector has a radius. The inner periphery also includes at least one relief defined in the plate. The relief extends radially outward relative to the radius of the sector. The gap is defined between the sector and the pole piece. The relief defines at least a part of the portion of the airflow path defined in the opposed member.

In yet a further additional feature of that aspect of the invention, the assembly has a central axis. The pole piece has a round portion. The opposed member is a disc having an outer periphery and a closed inner periphery extending about the round portion of the pole piece. The inner periphery has a plurality of sectors of a circular arc having a common radius, and a plurality of reliefs defined in the disc extending radially outward relative to the radius of the sectors. The round portion of the pole piece and the sectors are concentric about the axis. The gap is defined between the sectors and the pole piece, and the portion of the airflow path being defined, at least in part, by the reliefs. The reliefs and the sectors are arranged in a symmetrical array about the axis. In still yet a further additional feature of that aspect of the invention, the pole piece includes a the magnet.

In an additional feature of that aspect of the invention, for a loudspeaker having a round cylindrical voice coil for driving the diaphragm along an axis of reciprocation, and supporting structure for mounting the diaphragm to the flux path assembly, the opposed piece is a first plate mounted to one portion of the intermediate member. The intermediate member includes structure extending away from the first

plate, and a second plate mounted to the structure parallel to the first plate. The first plate has an inner periphery defining an opening, and the pole piece is mounted to extend at least partially from the second plate toward the first plate. The pole piece and the inner periphery co-operate to define a gap for accommodating reciprocating motion of the voice coil with the pole piece located internally with respect to the voice coil. The magnetic flux path assembly has an enclosed space defined between the pole piece, the structure, and the pair of plates. The pole piece has a first passageway defined therein to permit fluid communication between the cavity and the space. The first plate has venting defined therein to permit fluid communication between the space and external ambient.

In another additional feature of that aspect of the invention, the magnet has a circular cross-section perpendicular to the axis and a distal end extending away from the intermediate member. The pole piece has an end cap surmounting the distal end of the magnet. The end cap has a circular cross-section perpendicular to the axis and has a larger diameter than the distal end of the magnet. The distal end member has passages defined therethrough permitting, in use, fluid communication between the cavity and the space. In still another additional feature of that aspect of the invention, the end cap has an external periphery and the passages are channels formed in the periphery. In yet another additional feature of that aspect of the invention, the end cap has a round circular periphery and the passages are apertures formed through the end cap.

In another additional feature of that aspect of the invention, the venting includes flow director elements for enhancing convective heat transfer from the voice coil. In still another additional feature of that aspect of the invention, the venting includes at least one deflector for directing airflow toward the voice coil.

In yet still another additional feature of that aspect of the invention, the venting includes at least one tube having an outlet oriented to urge air displaced through the tube toward a portion of the voice coil.

In a further additional feature of that aspect of the invention, the tube is a bent tube having a pair of ends. One of the ends is oriented to urge air displaced through the tube toward a portion of the voice coil during flow in one direction. The other is

oriented to urge air displaced through the tube toward a portion of the voice coil during flow in the other direction.

In still a further additional feature of that aspect of the invention, for a voice coil having an external surface, the opposed member is a plate having a closed inner periphery defining an opening extending about the pole piece. The gap is defined between at least one portion of the periphery and the pole piece. The venting is defined by another portion of the periphery in the nature of a relief defined in the plate. The relief extends radially away from the pole piece and permits air to traverse the plate. The assembly has at least one air guide mounted to the plate to direct air flowing through the relief along at least a portion of the external surface of the voice coil.

In yet a further additional feature of that aspect of the invention, the assembly includes an array of the reliefs and a corresponding array of air guides spaced about the axis. In still yet a further additional feature of that aspect of the invention, the assembly has an internal enclosed space, and the venting permits air flow between the internal enclosed space and external ambient. The assembly has associated with at least one relief, an air guide mounted to extend from one side of the plate, and another air guide mounted to extend away from the other side of the plate. In yet another further additional feature of that aspect of the invention, the air guide is a channel having an open longitudinal side facing the voice coil, and the channel extends parallel to the axis.

In another aspect of the invention, there is a magnetic flux path assembly for a loudspeaker having a diaphragm, and a round cylindrical voice coil for driving the diaphragm along an axis of reciprocation. The voice coil and a diaphragm dust cap cavity are defined there within, and supporting structure for mounting the diaphragm to the flux path assembly. The magnetic flux path assembly has an annular magnet having a pair of annular faces and an inner wall defining an eye therethrough. It has a first plate mounted to one annular face of the magnet, a second plate mounted to the other annular face of the magnet, and a pole piece. The first plate has an inner periphery defining an opening, and the pole piece is mounted to extend at least partially through the eye from the second plate toward the first plate. The pole piece and the inner periphery co-operate to define a gap for accommodating reciprocating

motion of the voice coil with the pole piece located internally with respect to the voice coil. The magnetic flux path assembly has a space defined between the pole piece, the inner wall of the magnet, and the pair of plates. The pole piece has a first passageway defined therein to permit fluid communication between the cavity and the space. The first plate has venting defined therein to permit fluid communication between the space and external ambient.

In an additional feature of that aspect of the invention, the venting includes at least one aperture defined in the first plate, the aperture being segregated from the opening. In another additional feature of that aspect of the invention, the periphery includes at least one sector of a circular arc. The sector has a radius measured from the axis and relief defined in the first plate. The relief extends away from the axis a distance greater than the radius of the sector, whereby the venting is at least partially defined by the relief. In still another additional feature of that aspect of the invention, the pole piece is a hollow cylinder having a base end mounted to the second plate, a distal end for location within the voice coil, and a wall extending between the ends. The base end is closed. The distal end has an opening defined therein. The wall has at least one port defined therein to permit fluid flow between the cavity and the space through the cylinder.

In yet another additional feature of that aspect of the invention, the pole piece is a post having a base end mounted to the second plate, a distal end for location within the voice coil, the distal end having an end face for location facing the cavity, and a wall extending between the ends, a portion of the wall bounding the space. The pole piece has a passageway defined therein. One end of the passageway terminates at a port defined in the end face of the distal end of the pole piece. The passageway has another end that terminates at a port defined in the portion of the wall bounding the space.

In a further additional feature of that aspect of the invention, the passageway is a straight bore formed in the pole piece on an inclined angle relative to the axis. In still a further alternative additional feature of that aspect of the invention, the passageway has a first bore extending inwardly from the one end of the passageway, and a second bore extending inwardly from the other end of the passageway to intersect the first bore. In yet a further alternative additional feature of that aspect of the invention, the passageway has a first bore extending inwardly from the one end of

the passageway, and a second bore extending inwardly from the other end of the passageway to intersect the first bore. In another additional feature of that additional feature, the second bore is a cross-bore extending fully through the pole-piece and having openings at either end thereof.

5 In still another additional feature of that aspect of the invention, the pole piece is a post having a base end mounted to the second plate; a distal end for location within the voice coil, the distal end having an end face for location facing the cavity; a medial portion narrower than the distal end; and a transition wall extending between the distal end and the medial portion. A portion of the transition wall bounds the space. The pole piece has a passageway defined in it. One end of the passageway terminates at a port defined in the end face of the distal end of the pole piece. The passageway has another end that terminates at a port defined in the portion of the transition wall bounding the space.

10 In yet another additional feature of that aspect of the invention, the transition wall is chosen from the set of transition walls consisting of an annular shoulder extending radially perpendicular to the axis and a truncated conically tapered section. The passage is a bore extending parallel to the axis. In still another additional feature of that aspect of the invention, the pole piece is a post having a base end mounted to the second plate, a distal end for location within the voice coil, the distal end having an end face for location facing the cavity, and a wall extending between the ends. A portion of the wall bounds the space; and distal end of the pole piece has a sidewall extending parallel to the axis. The sidewall has a radius measured from the axis, and at least one relief defined in the sidewall. The relief extends radially inwardly relative to the radius of the sidewall. The relief has a first end defined in the end face, and a second end giving onto the enclosed space, whereby air can be displaced along the relief between the cavity and the enclosed space.

20 In yet still another additional feature of that aspect of the invention, the relief in the distal end of the pole piece is a groove formed in the pole piece. The groove extends parallel to the axis. In a further additional feature of that aspect of the invention, the inner periphery of the first plate includes at least one sector of a circular arc. The sector has a radius measured from the axis. The inner periphery also includes at least one first plate relief defined in the first plate. The first plate relief

extends away from the axis a distance greater than the radius of the sector, whereby the venting is at least partially defined by the first plate relief.

In still a further additional feature of that aspect of the invention, the at least one first plate relief is an array of slots formed in the first plate in a symmetrical pattern relative to the axis. The at least one relief in the pole piece is an array of grooves formed in the pole piece. The number of slots is equal to the number of grooves, and the slots are aligned opposite the grooves.

In another aspect of the invention, there is a loudspeaker . It has a diaphragm assembly having a movable membrane, a dust cap mounted to the moveable membrane, a voice coil former, a voice coil formed thereon, and a cavity defined within the dust cap and the former. The loudspeaker also has a magnetic flux path assembly having a magnet. A flux land is connected in a magnetically permeable path to one pole of the magnet. A pole piece is connected in a magnetically permeable path to the other pole of the magnet. The diaphragm assembly has framing mounted to the magnetic flux path assembly and a suspension to permit the voice coil to reciprocate relative to the framing. The pole piece extends within at least a part of the voice coil. The flux land is located in spaced relationship from the pole piece to define a gap therebetween for accommodating reciprocation of the voice coil. The magnet develops a magnetic flux across the gap. The loudspeaker has an internal space defined between the pole piece, the magnet, and the flux land. The pole piece has a passageway defined therein having a port opening on the cavity and another port opening on the space. The flux land has venting let therethrough to permit fluid communication between the space and an external environment, whereby displacement of the dust cap urges fluid to be displaced between the cavity and the external environment along a fluid communication pathway that includes the passageway, the space, and the venting.

In an additional feature of that aspect of the invention, a magnetically permeable suspension fluid is introduced into the gap. In another additional feature of that aspect of the invention, the pole piece is a hollow post. The port opening on the cavity is an open end of the post. The port opening on the space is an aperture let through a sidewall of the post, and the post has a base end, opposite to the open end, the base end being closed. In still another additional feature of that aspect of the invention, the pole piece is a post having a groove let along a face thereof. The port

opening on the cavity is one end of the spline, and the port opening on the space is another part of the spline. In still yet another additional feature of that aspect of the invention, the pole piece is a post having a longitudinal axis parallel to the direction of reciprocation of the voice coil, and the spline is parallel to the axis.

5 In another aspect of the invention there is a loudspeaker. It has a diaphragm assembly having a movable membrane, a voice coil former, a voice coil formed thereon, and a cavity defined within the membrane and the former. It has a magnetic flux path assembly having a magnet, a flux land connected in a magnetically permeable path to one pole of the magnet, and a pole piece connected in a magnetically permeable path to the other pole of the magnet. The diaphragm assembly is mounted to the magnetic flux path assembly, and has a suspension to permit the voice coil to reciprocate relative to the magnetic flux path assembly. The pole piece has a post for extending within at least a part of the voice coil. The flux land is located in spaced relationship from the pole piece to define a gap therebetween for accommodating reciprocation of the voice coil, the magnet developing a magnetic flux field across the gap. The loudspeaker has an internal space defined between the pole piece, the magnet, and the flux land. The flux land has venting let therethrough to permit fluid communication between the space and an external environment.

#### Brief Description of the Drawings

Figure 1 is a cross sectional view of a loudspeaker assembly of conventional construction;

Figure 2 is a cross sectional view of an example of a loudspeaker assembly according to the principles of the present invention;

Figure 3 shows an alternative embodiment of loudspeaker assembly to the assembly of Figure 2 having an undercut pole piece;

Figure 4a, shows another alternative to the loudspeaker of Figure 2, in which air guides are mounted to direct air traversing the top plate;

Figure 4b, shows an alternative vane arrangement to the loudspeaker of Figure 4a;

Figure 4c shows a plan view of a top-plate for the loudspeaker of Figure 4b;

Figure 5a shows a cross-section of an alternative to the loudspeaker of Figure 2 having an angular air communication passage;



Figure **5b** shows a cross-section of another alternative to the loudspeaker of Figure **2**, in which the pole piece is a tapered magnet having a vented cap;

Figure **6a** is a cross-section of an alternative to the loudspeaker of Figure **2** in which channels are provided adjacent to the voice coil;

Figure **6b** is a top view of the magnet assembly of the loudspeaker of Figure **6a**;

Figure **7** is a cross-section of a prior art closed cup tweeter;

Figure **8a** shows a tweeter with a pole-piece vented inside the magnet;

Figure **8b** shows an alternative embodiment of the loudspeaker of Figure **8a**.

#### Detailed Description of the Invention

The description which follows, and the embodiments described therein, are provided by way of illustration of an example, or examples of particular embodiments of the principles of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the description which follows, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings are not necessarily to scale and in some instances proportions may have been exaggerated in order more clearly to depict certain features of the invention. It will also be understood that although the loudspeakers described herein are shown in an upwardly oriented position, loudspeakers generally can be placed in horizontal, vertical, or tilted orientations. The terminology used when referring to top, back, front, inward, outward, upper or lower or other such term is not limited to a single orientation, but is given in the context of the illustrations.

Referring to Figure **1**, a low to mid-range frequency speaker, commonly referred to as a "woofer" is indicated generally as **20**, is shown in cross section. Loudspeaker **20** has a generally conical diaphragm member **22** that is mounted to a housing in the nature of a frame **24**, sometimes referred to as a "basket". The mounting of diaphragm member **22** is a resilient mounting having a lower, or inner suspension element in the nature of a damper, or spider **26** that extends from a narrower region of frame **24** to the throat **28** of diaphragm member **22**; and an upper, or outer, suspension member **30** in the nature of a surround **32**, of generally semicircular cross-section, that extends between the mouth **33** of conical diaphragm member **22** and the wider periphery **34** of the distal portion of frame **24**.

5 A round, cylindrical voice coil former, or bobbin **36**, depends from throat **28** of member **22**, to extend away from member **22**. The wall of bobbin **36** lies about an axis of linear reciprocation **40**, that is also the axis of revolution of conical diaphragm member **22**, and the central axis of loudspeaker **20** generally. Bobbin **36** is a thin walled, rigid circular cylinder, generally made of paper, KAPTON (T.M.), NOMEX (T.M.), aluminium, or other suitable material, upon which a voice coil **42** is wound. Voice coil **42** has a pair of leads **44** and **46** that extend along, and are glued to, the skin of conical diaphragm member **22**. A pair of flex, or tinsel, leads **48** and **50** carry input signals from terminals **52** and **54** to leads **46** and **48**.

10 The major portion of diaphragm member **22** is a truncated conical section, but is also includes a sealed membrane, in the nature of a dust cap **58** that extends across, and seals, the narrow, inner end of the conical section. Although member **22** is shown in the form of a truncated conical section, other shapes of diaphragm can be used, such as a spherical section, an ellipsoidal section, a pyramidal section, or a flat panel. 15 It could also be a fully conical section extending to a point, without a dust cap membrane on a different arc or plane. In each case the diaphragm assembly is such that it closes the end of the voice coil bobbin.

20 A magnet assembly **60** has an annular magnet **62**, a back plate **64**, and an inner, or top plate **66**, formed in a sandwich that is concentric about axis **40**. A pole piece in the nature of a central, round, cylindrical post **70** extends inwardly from back plate **64** towards conical diaphragm member **22**. The outer face **72** of post **70** has a diameter sufficiently smaller than the inside diameter of bobbin **34** to permit voice coil **42** to reciprocate in a direction of reciprocation parallel to axis **40**. A pole piece, like post **70**, is also sometimes called a T-yoke. Pole pieces can be formed integrally 25 with back plate **64**, either by machining from solid, by die casting, or by sintering of a compressed press powder metal part. Pole pieces can also be made by cold forming a cylindrical part to clinch on back plate **64**, or by welding, or a number of other fabricating processes. A typical pole piece, such as post **70**, has a central through bore **74**, that carries through an opening **76** in back plate **64** to give an airflow passage to external ambient. Most typically, top plate **66** is a flat, annular disc having one face 30 bonded to magnet **62**. Top plate **66** has an inner face **76** having an inside diameter that is just large enough to let voice coil **42** travel without interference. Other forms of top plate can be made, whether plates of relatively great thickness, with a taper or

chamfer toward the inner edge, such as used in an over hung speaker, or relatively thin plates having a flange formed at their inner edge, such as used in an under-hung speaker.

Typically, back plate 66, top plate 68, and pole piece, or post 70, are made of a materials of high magnetic permeability, such as a iron, steel or other ferrous alloy, or a nickel or cobalt alloy, or similar material. Most commonly they are made of iron or steel. When mated with magnet 62 they combine to form a magnetic flux path assembly, or magnetic circuit, that is complete but for a gap between the inner annular face 67 of top plate 68 and adjacent distal region 78 of post 70. This gap, indicated as 80, is sized to accommodate movement of voice coil 42. One of the factors determining the overall efficiency of the speaker is the size of air gap 80. Since the reluctance of the metal members is very much smaller than the reluctance of air gap 80, it is desirable that air gap 80 be as small as possible without interfering with the free movement of voice coil 42, allowing for manufacturing tolerances in the size of voice coil 42, in the inside diameter of face 67, and in the manufacture of the diaphragm assembly 22 generally.

Frame 24 is mounted to magnet assembly 60 by a footing 82. When a time varying voltage is applied across terminals 52 and 54 voice coil 42 will move in the direction of axis 40 through the magnetic field prevailing across gap 80. Inasmuch as bobbin 36 is rigid, any displacement of voice coil 42 will be matched by an equal translation of conical diaphragm member 22. The limit of this motion will be determined by the time varying signal applied, and by the suspension. In due course the suspension will return the diaphragm assembly to its initial position.

A voice coil cavity, or diaphragm cavity 84 is defined as the open space within voice coil 42 bounded by the inner surface of the sealed central membrane of the diaphragm, that is, dust cap 58, lying beyond the end face 85 of distal end 78 of the pole piece, post 70. The outer cylindrical boundary of cavity 84 is the inner wall of bobbin 36. The mean, or reference volume of cavity 84 is, in general, its volume at rest. Inasmuch as top plate 66 is annular, it lies entirely outside, that is, external to, bobbin 36, voice coil 42, and cavity 84. The volume of cavity 84 is not constant over time, but varies with the displacement of dust cap 58. Since dust cap 58 is, as noted, a sealed membrane, motion of bobbin 36 carrying voice coil 42, and hence conical diaphragm member 22 results in the displacement of a volume of air along bore 74 of

post 70. In operation at low volumes and moderate frequencies, the volumetric displacement is relatively small. However, typically at lower frequencies yielding large translations of voice coil 42, the volume of air displaced may be significant relative to the overall volume of cavity 84. This displacement of dust cap 58 results in an exchange of air through bore 74. If bore 74 is closed, motion of voice coil 42 will tend to cause a compression (or expansion) effect since motion of dust cap 58 would tend to compress (or expand) the air in cavity 84, and in bore 74, however large its enclosed volume may be.

Another enclosed space 90 is defined within a round cylindrical inner surface 92 of annular magnet 62, and the outer surface 94 of the pole piece, post 70. This space is capped at either end by top plate 66 and backplate 64. Since gap 80 is relatively small, rapid displacement of bobbin 36 and voice coil 42 will tend to compress (or expand) the air trapped in space 90.

In terms of the magnetic flux path assembly described above, the magnet need not be the annular disc, but could be any of the elements, whether post 70, top plate 66, back plate 64, or, as shown, magnet 62, provided that there is a magnetic element of some kind in the magnetic circuit at some location. Similarly, the precise geometry of top plate 66 and post 70 can be varied. In general, there is a pole piece of some kind, a magnetic flux land adjacent to the pole piece, and a connecting member, whether made up of a single part or several parts joined together, that provides a relatively high magnetic permeability path between the flux land and the pole piece. The term high magnetic permeability is used in contrast to the magnetic permeability of the air gap, which is several orders of magnitude lower.

When low frequencies (bass) are applied to the woofer, the cone moves away from the magnet, or toward the magnet, depending on polarity. The frequency dictates how often per second the cone moves, and the magnitude of the voltage will determine the amplitude of the displacement against the restoring force of the suspension. When high power bass is applied, the woofer described above uses dust cap 58 to pump air through the vent, that is, the airflow passage, formed by bore 74 and the corresponding opening 76 in backplate 66. The motion of dust cap 58 causes cool air to be sucked in, and warmed air to be blown out through the back of magnetic assembly 60. This tends to provide some cooling for the pole piece.

Referring to Figure 2, another loudspeaker is shown in cross-section, and indicated generally as **100**. It has a conical diaphragm member **102**, upper and lower suspension members **104** and **106**, terminals **108** and **110**, lead wires **112** and **114**, a dust cap **116**, a bobbin **118** and a voice coil **120**, arranged in generally the same fashion as noted above. Unless stated otherwise, these and other parts have generally the same construction and physical properties of the corresponding elements illustrated and described in the context of Figure 1. The central axis of loudspeaker **100**, which is also the axis of reciprocation of voice coil **120**, is indicated as **121**.

An array of ventilation ports, or passages **122**, have been let through top plate **124**. Passages **122** can be formed in top plate **124** by being drilled, punched, pierced, cast, or formed by other conventional means. Although a single passage could be used, a symmetrical array of four passages on 90 degree centers about voice coil **120** is preferred. Passages **122** should have dimensions chosen to avoid, or discourage, whistling over the operational range of loudspeaker **100** generally.

Notably, back plate **126** does not have a central opening, but rather, the pole piece, that is, central post **128**, has a bore **130** that has a closed end **132** closed at back plate **126**. Vents, in the nature of lateral passages **134**, permit fluid communication between bore **130** and an annular chamber, or space **136** that lies about the exterior wall **137** of post **128**, and within the interior wall **139** of annular magnet **138** (which wall, **139** defines the eye of magnet **138**), and corresponds generally to space **90** described above. Also the lower portion **140** of basket, or frame **142** has perforations **144** such that the otherwise enclosed space, or chamber, **146** that lies between top plate **124** and lower suspension member **106** is vented to ambient. Although it is preferred to perforate lower portion **140** in this way, it would be possible to vent lower suspension member **106** to permit fluid communication to ambient as well.

Inasmuch as the clearance between bobbin **118** and post **128** is very small, displacement of voice coil **120**, and consequent displacement of the other members of the diaphragm assembly, will tend to force air to be displaced from (or to) cavity **148** under dust cap **116** (corresponding, generally, to cavity **84**), forcing some air to flow through passages **134** and, in turn, through passages **122** and perforations **144**. Large, low frequency displacements may tend to have the most pronounced effect in terms of air displacement.

In general use, the heating of voice coil **120** in use tends also to warm top plate **124** and post **128**. The exchange of air through the passages indicated as items **122**, **134**, and **144** tends to promote cooling of top plate **124** and post **128**. This also tends to promote cooling of voice coil **120**, with the result that loudspeaker **100** may tend to operate at a lower temperature than otherwise. Since voice coil **120** remains cooler, the increase in impedance of the coil due to heating may tend to be less than it might otherwise be, and the overall performance of the speaker may tend to be correspondingly improved. In effect, a relatively smaller loudspeaker may tend to be able to perform at a higher power level that would otherwise suggest the employment of a larger, possibly heavier and more expensive, loudspeaker unit.

The size and number of openings let through top plate **124** is neither so numerous nor so large as to detract significantly from thermal conduction in top plate **124**. Since the velocity of the air is greatest at the apertures, passages **122**, and since an exchange of hot air for cooler ambient air is promoted, the apertures may tend to be locations of relatively high convection heat transfer from top plate **124**. It is preferred that these apertures be smoothly radiused to discourage whistling.

Notably, loudspeaker **100** illustrated in cross-section in Figure 2 does not employ an aerodynamic vane or body in bore **74**, and as shown, does not employ complex channels of changing diameter or taper, although it could do. Although air communication passageways need not be straight, and could be formed at an angle, or on a taper, in dogleg form, or in a curved form and could have flared, rounded, or chamfered ends to reduce air noise, it is nonetheless preferred that the passages in post **70** be capable of fabrication by drilling or punching, or otherwise forming, as straight bores of constant diameter or slots of constant thickness, and that the openings in top plate **124** be formed by a similarly direct method to tend to reduce the cost and complexity of manufacture.

In the alternative embodiment of Figure 3, parts that are the same as indicated in the context of the loudspeaker of Figure 2 are given the same identifying item numbers. The embodiment of loudspeaker of Figure 3, indicated generally as **149**, differs from that of Figure 2 in that the pole piece, **150**, is a solid pillar having a narrow end **151** mounted to backplate **126**, and a widened distal end **152** about which voice coil **120** rides. The central axis is indicated as **154**. Pole piece **150** has a medial shoulder **156** such that distal end **152** has an overhang relative to narrow end **151**.

Medial shoulder 156 forms a transition wall between outer wall 155 of narrow end 151 and outerwall 157 of distal end 152. Distal end 152 also has a distal end face 158 facing dust cap cavity. An array of straight through bores 160 each running parallel to axis 154 has been formed between face 158 and the annular face of shoulder 156. The array can have any number found suitable to permit passage of air from cavity 162 beneath dust cap 116 and space 164 lying about pole piece 150 within magnet 136, without noticeable whistling over the operational range of loudspeaker 148.

In the alternative embodiment of Figure 4a, parts that are the same as indicated in the context of the loudspeaker of Figure 2 are again given the same identifying item numbers. A loudspeaker is indicated generally as 170. It differs from that of Figure 2 in air deflectors, in the nature of vanes 172, 174 are shown mounted to each of passages 122 in top plate 124. Vanes 172 and 174 are intended to promote enhanced heat transfer by convection from the end regions 176 and 178 of voice coil 120. Vanes 172 and 174 could be formed as duct elbows, as shown, or as airfoils, or as deflector plates for imparting an inward radial component of momentum to the air displaced through top plate 124, such that air discharged from either vane 172 or 174 will tend to have a component of velocity toward voice coil 120, whether that velocity is directly radially inward with little or no tangential component, or whether, as is alternatively possible, there is a significant tangential component of velocity relative to voice coil 120 (that is, whether the vanes are angled to give a circumferential component of velocity as well). Similarly, the intake of vanes 172 and 174 is adjacent to regions 176 and 178 of voice coil 120, to tend to encourage a higher rate of air exchange in those regions for encouraging improved heat transfer.

The inventor has noted that when loudspeaker elements are driven by too strong a signal, or by a clipped signal, at terminals 108 and 110 regions 176 and 178 tend to be the regions of voice coil 120 most prone to burn out prematurely. Vanes 172 and 174 may tend to enhance the tolerance, or the endurance, of regions 176 and 178 for operation under such conditions.

Figure 4b shows an alternative loudspeaker 180. It is similar to loudspeaker 170, except insofar as it has a top plate 182 having an array of reliefs or notches 184 in the nature of roughly semi-circular cusps defined in plate 182 spaced about its inner edge 186, rather than having holes formed through its main portion generally. As illustrated there are 7 notches on equal degree centers about axis 188, notches 184

being spaced apart by portions **185** of the closed inner periphery **187** of plate **182** that defines opening **183** in plate **182**. Portions **185** are sectors of a circular arc, concentric about axis **121** at a radius indicated as 'R'. Plate **182** also has a circular outer periphery **188** that is concentric with portions **185** and pole piece, or post, **128**. Gap **191** is defined between portions **185** and post **128**. Notches **184** provide venting through plate **182** to permit displacement of air between enclosed space **136**, and external ambient **193**. Corresponding vane arrays **190** and **192** are mounted to extend from either side of top plate **182**, to channel the air displaced by the motion of dust cap **116** along the face of voice coil **120** in the angular intervals corresponding to the location of notches **184**. Figure **4c** is a plan view of top plate **182** showing the distribution of notches **184**.

In an alternative embodiment, the alternative, solid, undercut pole piece, **150** of Figure **3** could be used with loudspeaker **170** of Figure **4a** or **4b**.

In the alternative embodiment of loudspeaker **200** illustrated in Figure **5a**, pole piece **202** has an angled passageway **204**. An angled passageway, having one side **206** longer than the other **208**, may tend to discourage resonance phenomena.

In the alternative embodiment of Figure **5b**, a loudspeaker **210** is shown having a magnet **212** in the form of a pole piece, with a cap **214**, a top plate **216**, and support structure such as a linking member in the form of a ferro-magnetic cup **218**. Magnet **212** is mounted centrally on cup **218**, and is tapered from a relatively wide base **220** to a distal narrower end **222**. That is, magnet **212** is a truncated conical section. Cap **214** is a round disc that has passages **224** formed in it to permit air to be displaced between cavity **226** and internal space **228**. As before, top plate **216** has passages **230** to permit displacement of air between space **228** and external ambient, indicated generally as **232**, through openings in the basket or spider, or both, or through a similar passageway or groove, or space formed to permit airflow between the space indicated as **234** and ambient **232**.

In the alternative embodiment of Figures **6a** and **6b**, a loudspeaker **240** has a pole piece **242** and a top plate **244**. The space between them is indicated as **246**. Pole piece **242** has an array of four vertical channels **248** formed on ninety degree centers in its external face **250** parallel to central axis **252** of loudspeaker **240**. Pole piece **242** does not have a hollow center passage for conducting air in this example. Four semi-



5 circular notches, or rebates or reliefs, or bights **254** are punched in top plate **242** each being formed opposite one of channels **248**. Reciprocation of voice coil **120** will tend to cause air to be displaced in one direction in channels **248** parallel to axis **252**, and in the other direction through bights **254**. The critical gap dimension, indicated by  $\Lambda$  remains the distance between the remaining flux lands **256** of top plate **242** and the arcuate portions of pole piece **242** lying on its outer diameter. That is, space **246** is defined, on one side by the external side wall face **250** of the distal end region **241** of pole piece **242** opposite the opposed flux land **256** of the opposed member, top plate **244**. The other side of space **246** is defined by the closed inner peripheral wall **243**, or face, of top plate **244**. Peripheral wall **243** has portions, namely sectors **245**, that are sectors of a circular arc, all of sectors **245** being concentric about axis **252** and lying at a radius  $R_2$  therefrom. Peripheral wall **243** also has reliefs in the nature of bights **254** that extend outwardly of radius  $R_2$  a distance indicated as  $M$ .

10 It will be noted that vertical channels **248** of pole piece **242** are interspersed with arcuate sectors **247** about distal end region **241** of pole piece **242**. Sectors **247** are circular arcs concentric about axis **252**, and lie at a radius  $R_3$  therefrom. Channels **248** extend radially inward of radius  $R_3$  a distance indicated as  $M_2$ .

15 Gap 'G' is defined between sectors **247** and **245**. Sectors **247** and **245** channels **248** and bights **254** are all in the form of arrays arranged equally and symmetrically about planes intersecting axis **252**.

20 Neither bights **254** nor channels **248** need be formed in a semi-circular, or circular arc shape, but could be splines such as V-notches, keyways such as three-sided square notches, tapered notches, or some other form. Where such channels are used, the more-or-less semi-circular arcs shown are preferred. Channels **248** need not extend to the point at which the base **256** of pole piece **242**, but merely far enough to provide a clear passage past the most distant extremity of bobbin **118** from dust cap **116**, at its maximum excursion toward back plate **126**. Where used, it is preferred that channels **248** extend parallel to axis **252**. However they could be skewed or inclined with respect to axis **252**, such as to form a helical pathway or groove in the sidewall face of pole piece **242**.

25 In alternate embodiments, a pole piece, such as pole piece **242** could be used in conjunction with a top plate lacking bights **124**, but having passages such as

passages 132 of top plate 124, or, alternatively, a top plate having notches, such as bights 124 could be used in conjunction with the pole piece of any of Figures 2, 3, 4a, 4b, 5a or 5b.

It is not necessary that the opening in the top plate have a round, that is, circular form, or that it be a closed periphery, although this is preferred. The shape of the opening or slot in the top plate does correspond to the shape of the pole piece in cross-section, and to the shape of the voice coil in cross section, to define the gap width, such as the width 'G' described above. The general shape of the opening, whether in the context of Figure 2, 3, 4a, 4b, 5a or 5b, could be round, triangular, oval, elliptical, square, hexagonal, star shaped, or some other arbitrary shape such as may be chosen. Similarly, the sectors of the circular arcs need not be concentric about a common axis, and need not be circular sectors.

Figure 7 shows a tweeter 300 of conventional design with a diaphragm assembly 302 having a dome membrane 304, a resilient suspension 306 surrounding the dome, a pair of leads 308, 310 leading, respectively to terminals 312 and 314, a bobbin 316 and a voice coil 318 formed on bobbin 316. Tweeter 300 also has a magnetic assembly 320 having a top plate 322, an annular magnet 324, and a backplate 326. The central axis of tweeter 300 is indicated as 330. Top plate 322 is annular, and has an inner, chamfered edge and a flux land 332 opposite the distal end 334 of pole piece 336 mounted to backplate 326. Pole piece 336 is hollow, having a central bore 338 extending from a cavity 340 under dust cap, or dome membrane 304 fully through back plate 326.

Notably, the back of tweeter 300 is closed off by a backshell, or cup, 342. The internal volume 344 of cup 342 is large relative to the volume of cavity 340, such that air pressure variations under membrane 304 do not interfere excessively with operation of tweeter 300 generally. In practice volume 344 of cup 342 tends to be chosen by the speaker designer to provide an optimum operating resonance condition at the design point of the tweeter, and to provide acceptable performance over the tweeter operating range to either side of the design point.

Also shown in Figure 7 is a space 346 defined between the circular inner face 348 of annular magnet 324, the outer face 349 of pole piece 336, top plate 322, and backplate 326. This space, or chamber, or enclosed volume, is analogous to space 90

described above. In tweeter **300** shown in Figure 7, a face plate **350** mounts diaphragm assembly **302** to magnetic assembly **320**. There is neither venting through top plate **322** nor through back plate **326** in communication with space **346**.

Figure **8a** shows a tweeter **380**. Again, common parts with tweeter **300** are indicated by common item numbers. Tweeter **380** does not have a central bore, and backplate **382** is imperforate. That is, backplate **382** does not have a communicating passageway for permitting air to enter or exit tweeter **380**. Tweeter **380** has a pole piece **384** that has a passage **386** defined in it extending between distal face **388** of the distal end portion of pole piece **384** and a port **390** located on the trunk, or circular sidewall **392** of pole piece **384** to give onto space **346**. As shown, displacement of dome membrane **304** parallel to axis **330** will tend to compress or expand the air not only in cavity **340** under dust cap dome membrane **304**, but also the volume of air entrapped in space **346**. The elimination of cup **342** tends to reduce the depth, and the overall enclosure envelope, of tweeter **380** as compared to tweeter **300**. The inclination of passage **386** and the inequality of length of its sides **394** and **396** tends to give a different, and preferred, frequency response characteristic to that obtained with the passage shown in Figure 7. Passage **386** of Figure **9a** need not be round, or straight, but could vary in shape, angle, aspect ratio, or cross-sectional area.

Figure **8b** shows a cross-section of a tweeter **400**. In this embodiment a pole piece **402** is provided having an obstructed, or capped end **404** at backplate **406**, and a well, in the nature of a blind bore **408** extending inwardly from its distal end **410**. A cross bore **412**, shown as having a smaller diameter, is formed, typically by drilling, across the trunk **414** of pole piece **402** to intersect bore **408** at its profound end. Cross-bore **412** is open at either end to space annular **416** such that a path of fluid communication is established between space **416** and cavity **418** under dust cap dome membrane **420**. In this way, reciprocation of membrane **420** will again cause compression and expansion not only of the volume of cavity **418** but also of space **416**. Again, tweeter **400**, like tweeter **380**, does not employ a backshell, or cup such as cup **342**.

Various embodiments of the invention have now been described in detail. Since changes in and or additions to the above-described best mode may be made without departing from the nature, spirit or scope of the invention, the invention is not to be limited to those details, but only by the appended claims.

CLAIMS

I claim:

1. A magnetically permeable plate for use as the front plate of a magnetic flux path assembly of a loudspeaker, the loudspeaker having a diaphragm driven by a voice coil, the magnetic flux assembly having a pole piece, a magnet, and a magnetic flux path between one pole of the magnet and the pole piece, wherein:

said plate has an opening defined therein sized to fit about the pole piece and to co-operate with the pole piece to define a gap for accommodating movement of the voice coil therebetween; and

said top plate has venting defined therein to permit fluid communication through said plate external to the voice coil.

2. The plate of claim 1 wherein said plate has an outer periphery, an inner periphery defining said opening, and said venting is segregated from said inner periphery.

3. The plate of claim 2 wherein said plate has the form of a disc in which said inner and outer peripheries are circular and concentric.

4. The plate of claim 3 wherein said venting includes an array of apertures spaced outwardly from, and having a pitch circle concentric with, said inner periphery.

5. The plate of claim 4 wherein said apertures are circular.

6. The plate of claim 1 wherein said opening has a nominal periphery and said venting includes at least one rebate let into said nominal periphery.

7. The plate of claim 1 wherein said opening has a crenellated profile.

8. A magnetic flux path assembly for a loudspeaker having a diaphragm, a voice coil for driving the diaphragm and a diaphragm cavity defined therewithin, wherein:

said magnetic flux path assembly has a pole piece, an opposed member placed in spaced relationship from the pole piece to define a gap for

accommodating reciprocation of the voice coil, and at least one intermediate member mounted to maintain the position of said pole piece and said opposed member relative to each other;  
said pole piece, said intermediate member, and said opposed member co-operating to form a continuous path of higher magnetic permeability than said gap;  
at least one of said pole piece, said at least one intermediate member, and said opposed member includes a magnet for establishing a magnetic flux in said magnetic flux path assembly and across the gap;  
said magnetic flux path assembly has an airflow path defined therein extending between the dust cap cavity and external ambient, for permitting displacement of air between the cavity and external ambient; and  
at least a portion of said airflow path is defined in said opposed member external to said gap,  
whereby displacement of air by the dust cap member causes motion of air in said portion of said airflow path to encourage cooling of said opposed member.

9. The magnetic flux path assembly of claim 8 wherein said opposed member is a plate having an outer periphery, a closed inner periphery defining an opening extending about said pole piece, said gap lying between said periphery and said pole piece, and said portion of said airflow path is formed in said plate and is segregated from said opening.

10. The magnetic flux path assembly of claim 9 wherein said plate has the form of a disc in which said inner and outer peripheries are circular and concentric.

11. The magnetic flux path assembly of claim 10 wherein said portion of said airflow path formed in said plate includes an array of apertures spaced outwardly from, and having a pitch circle concentric with, said inner periphery.

12. The magnetic flux path assembly of claim 8 wherein said opposed member is a plate having an outer periphery, a closed inner periphery defining an opening extending about said pole piece, said gap lying between said periphery and said pole

piece, and at least one portion of said inner periphery defines said gap, and another portion of said periphery defines said portion of said airflow path defined in said opposed member.

13. The magnetic flux path assembly of claim 8 wherein:

5           said magnetic flux path assembly has an axis parallel to the direction of reciprocation of the voice coil, said pole piece has a distal region thereof distant from said rigid member, said distal region having the form of a body of revolution concentric with said axis;

10           said opposed member is a plate having a closed inner periphery extending about said pole piece distal region;

          said inner periphery has

          at least one sector of a circular arc concentric with said distal region, said sector having a radius,

15           and at least one relief defined in said plate, said relief extending radially outward relative to the radius of said sector;

          said gap is defined between said sector and said pole piece; and

          said relief defines at least a part of said portion of said airflow path defined in said opposed member.

20   14. The magnetic flux path assembly of claim 8 wherein:

          said assembly has a central axis;

          said pole piece has a round portion;

25           said opposed member is a disc having an outer periphery and a closed inner periphery extending about said round portion of said pole piece;

          said inner periphery has a plurality of sectors of a circular arc having a common radius, and a plurality of reliefs defined in said disc extending radially outward relative to the radius of said sectors;

30           said round portion of said pole piece and said sectors are concentric about said axis;

said gap being defined between said sectors and said pole piece, and  
said portion of said airflow path being defined, at least in part,  
by said reliefs; and  
said reliefs and said sectors are arranged in a symmetrical array about  
said axis.

15. The magnetic flux path assembly of claim 8 wherein said pole piece includes a  
said magnet.

16. The magnetic flux path assembly of claim 8, for a loudspeaker having a round  
cylindrical voice coil for driving the diaphragm along an axis of reciprocation, and  
supporting structure for mounting the diaphragm to the flux path assembly, wherein:

said opposed piece is a first plate mounted to one portion of said intermediate  
member;

said intermediate member has structure extending away from said first plate,  
and a second plate mounted to said structure parallel to said first plate;

said first plate has an inner periphery defining an opening, and said pole piece  
is mounted to extend at least partially from said second plate toward  
said first plate;

said pole piece and said inner periphery co-operate to define a gap for  
accommodating reciprocating motion of the voice coil with the pole  
piece located internally with respect to the voice coil;

said magnetic flux path assembly has an enclosed space defined between said  
pole piece, said structure, and said pair of plates;

said pole piece has a first passageway defined therein to permit fluid  
communication between the cavity and said space; and

said first plate has venting defined therein to permit fluid communication  
between said space and external ambient.

17. The magnetic flux path assembly of claim 15 wherein:  
said magnet has a circular cross-section perpendicular to the axis and a distal  
end extending away from said intermediate member;

said pole piece has an end cap surmounting said distal end of said magnet, said  
end cap having a circular cross-section perpendicular to the axis and  
having a larger diameter than said distal end of said magnet; and  
said distal end member has passages defined therethrough permitting, in use,  
fluid communication between the cavity and said space.

18. The magnetic flux assembly of claim 17 wherein said end cap has an external  
periphery and said passages are channels formed in said periphery.

19. The magnetic flux path assembly of claim 17 wherein said end cap has a round  
circular periphery and said passages are apertures formed through said end cap.

20. The magnetic flux path assembly of claim 8 wherein said venting includes  
flow director elements for enhancing convective heat transfer from the voice coil.

21. The magnetic flux path assembly of claim 8 wherein said venting includes at  
least one deflector for directing airflow toward the voice coil.

22. The magnetic flux assembly of claim 8 wherein said venting includes at least  
one tube having an outlet oriented to urge air displaced through said tube toward a  
portion of the voice coil.

23. The magnetic flux assembly of claim 22 wherein said tube is a bent tube  
having a pair of ends, one of said ends being oriented to urge air displaced through  
said tube toward a portion of the voice coil during flow in one direction, the other  
being oriented to urge air displaced through said tube toward a portion of the voice  
coil during flow in the other direction.

24. The magnetic flux assembly of claim 8, the voice coil having an external  
surface, wherein:

said opposed member is a plate having a closed inner periphery defining an  
opening extending about said pole piece, said gap being defined  
between at least one portion of said periphery and said pole piece;



said venting being defined by another portion of said periphery in the nature of a relief defined in said plate, said relief extending radially away from said pole piece and permitting air to traverse said plate; and said assembly has at least one air guide mounted to said plate to direct air flowing through said relief along at least a portion of the external surface of the voice coil.

25. The magnetic flux path assembly of claim 24 wherein said assembly includes an array of said reliefs and a corresponding array of air guides spaced about the axis.

26. The magnetic flux assembly of claim 24 wherein said assembly has an internal enclosed space, and said venting permits air flow between said internal enclosed space and external ambient, and said assembly has associated with at least one said relief, an air guide mounted to extend from one side of said plate, and another air guide mounted to extend away from the other side of said plate.

27. The magnetic flux assembly of claim 24 wherein said air guide is a channel having an open longitudinal side facing the voice coil, and said channel extends parallel to the axis.

28. A magnetic flux path assembly for a loudspeaker having a diaphragm, a round cylindrical voice coil for driving the diaphragm along an axis of reciprocation, the voice coil and a diaphragm dust cap cavity defined there within, and supporting structure for mounting the diaphragm to the flux path assembly, wherein:

said magnetic flux path assembly has an annular magnet having a pair of annular faces and an inner wall defining an eye therethrough, a first plate mounted to one annular face of said magnet, a second plate mounted to the other annular face of said magnet, and a pole piece;

said first plate has an inner periphery defining an opening, and said pole piece is mounted to extend at least partially through said eye from said second plate toward said first plate;

said pole piece and said inner periphery co-operate to define a gap for accommodating reciprocating motion of the voice coil with the pole piece located internally with respect to the voice coil;

said magnetic flux path assembly has a space defined between said pole piece,  
said inner wall of said magnet, and said pair of plates;  
said pole piece has a first passageway defined therein to permit fluid  
communication between the cavity and said space; and  
5 said first plate has venting defined therein to permit fluid communication  
between said space and external ambient.

29. The magnetic flux path assembly of claim 28 wherein said venting includes at  
least one aperture defined in said first plate, said aperture being segregated from said  
opening.

10 30. The magnetic flux path assembly of claim 28 wherein said periphery includes:  
at least one sector of a circular arc, said sector having a radius  
measured from said axis; and  
a relief defined in said first plate, said relief extending away from said  
axis a distance greater than the radius of said sector,  
15 whereby said venting is at least partially defined by said relief.

31. The magnetic flux path assembly of claim 28 wherein:  
said pole piece is a hollow cylinder having a base end mounted to said  
second plate, a distal end for location within the voice coil, and  
a wall extending between said ends;  
20 said base end is closed, said distal end has an opening defined therein;  
and said wall has at least one port defined therein to permit  
fluid flow between the cavity and said space through said  
cylinder.

32. The magnetic flux path assembly of claim 28 wherein:  
25 said pole piece is a post having a base end mounted to said second  
plate, a distal end for location within the voice coil, said distal  
end having an end face for location facing the cavity, and a wall  
extending between said ends, a portion of said wall bounding  
said space; and

said pole piece has a passageway defined therein, one end of said passageway terminating at a port defined in said end face of said distal end of said pole piece, said passageway having another end terminating at a port defined in said portion of said wall bounding said space.

33. The magnetic flux path assembly of claim 28 wherein said passageway is a straight bore formed in said pole piece on an inclined angle relative to the axis.

34. The magnetic flux path assembly of claim 32 wherein said passageway has a first bore extending inwardly from said one end of said passageway, and a second bore extending inwardly from said other end of said passageway to intersect said first bore.

35. The magnetic flux path assembly of claim 32 wherein said second bore is a cross-bore extending fully through said pole-piece and having openings at either end thereof.

36. The magnetic flux assembly of claim 28 wherein  
said pole piece is a post having a base end mounted to said second plate, a distal end for location within the voice coil, said distal end having an end face for location facing the cavity, a medial portion narrower than said distal end and a transition wall extending between said distal end and said medial portion, a portion of said wall bounding said space; and  
said pole piece has a passageway defined therein, one end of said passageway terminating at a port defined in said end face of said distal end of said pole piece, said passageway having another end terminating at a port defined in said portion of said wall bounding said space.

37. The magnetic flux assembly of claim 36 wherein said transition wall is chosen from the set of transition walls consisting of:

- (a) an annular shoulder extending radially perpendicular to said axis; and

(b) a truncated conically tapered section; and  
said passage is a bore extending parallel to the axis.

38. The magnetic flux path assembly of claim 28 wherein:

5 said pole piece is a post having a base end mounted to said second plate, a distal end for location within the voice coil, said distal end having an end face for location facing the cavity, and a wall extending between said ends, a portion of said wall bounding said space; and

10 said distal end of said pole piece has a sidewall extending parallel to the axis, said sidewall having a radius measured from said axis, and at least one relief defined in said sidewall, said relief extending radially inwardly relative to said radius of said sidewall, and

15 said relief has a first end defined in said end face, and a second end giving onto said enclosed space, whereby air can be displaced along said relief between the cavity and the enclosed space.

39. The magnetic flux path assembly of claim 38 wherein said reliefs in said distal end of said pole piece are grooves formed in said pole piece extending parallel to the axis.

20 40. The magnetic flux path assembly of claim 38 wherein said inner periphery of said first plate includes:

at least one sector of a circular arc, said sector having a radius measured from said axis; and

25 at least one first plate relief defined in said first plate, said first plate relief extending away from said axis a distance greater than the radius of said sector,

whereby said venting is at least partially defined by said first plate relief.

30 41. The magnetic flux path assembly of claim 40 wherein said at least one first plate relief is an array of slots formed in a symmetrical pattern in said first plate relative to the axis, said at least one relief in said pole piece is an array of grooves

formed in said pole piece, the number of slots is equal to the number of grooves, and said slots are aligned opposite said grooves.

42. A loudspeaker comprising:

a diaphragm assembly having a movable membrane, a dust cap mounted to said moveable membrane, a voice coil former, a voice coil formed thereon, and a cavity defined within said dust cap and said former;

a magnetic flux path assembly having a magnet, a flux land connected in a magnetically permeable path to one pole of the magnet, and a pole piece connected in a magnetically permeable path to the other pole of the magnet;

said diaphragm assembly having framing mounted to said magnetic flux path assembly, and having a suspension to permit said voice coil to reciprocate relative to said framing;

said pole piece extending within at least a part of said voice coil; said flux land being located in spaced relationship from said pole piece to define a gap therebetween for accommodating reciprocation of the voice coil, the magnet developing a magnetic flux across the gap;

said loudspeaker having an internal space defined between said pole piece, said magnet, and said flux land;

said pole piece having a passageway defined therein having a port opening on said cavity and another port opening on said space; and

said flux land having venting let therethrough to permit fluid communication between said space and an external environment;

whereby displacement of said dust cap urges fluid to be displaced between said cavity and the external environment along a fluid communication pathway that includes said passageway, said space, and said venting.

43. The loudspeaker of claim 43 wherein a magnetically permeable suspension fluid is introduced into said gap.

44. The loudspeaker of claim 43 wherein said pole piece is a hollow post, said port opening on said cavity being an open end of said post, said port opening on said

space being an aperture let through a sidewall of said post, and said post has a base end, opposite to said open end, said base end being closed.

45. The loudspeaker of claim 44 wherein said pole piece is a post having a groove let along a face thereof, said port opening on said cavity being one end of said spline, and said port opening on said space being another part of said spline.


46. The loudspeaker of claim 46 wherein said pole piece is a post having a longitudinal axis parallel to the direction of reciprocation of said voice coil, and said spline is parallel to said axis.

47. A loudspeaker comprising:  
a diaphragm assembly having a movable membrane, a voice coil former, a voice coil formed thereon, and a cavity defined within said membrane and said former;  
a magnetic flux path assembly having a magnet, a flux land connected in a magnetically permeable path to one pole of the magnet, and a pole piece connected in a magnetically permeable path to the other pole of the magnet;  
said diaphragm assembly being mounted to said magnetic flux path assembly, and having a suspension to permit said voice coil to reciprocate relative to said magnetic flux path assembly;  
said pole piece having a post for extending within at least a part of the voice coil;  
said flux land being located in spaced relationship from said pole piece to define a gap therebetween for accommodating reciprocation of the voice coil, the magnet developing a magnetic flux field across the gap;  
said loudspeaker having an internal space defined between said pole piece, said magnet, and said flux land; and  
said flux land having venting let therethrough to permit fluid communication between said space and an external environment.

## **LOUDSPEAKER**

### **Abstract of the Disclosure**

5           A loudspeaker has a magnetic flux assembly that has a pole piece and a plate  
and magnet structure for co-operating with a voice coil. The plate structure includes a  
top plate which is mounted adjacent to the diaphragm assembly of the loudspeaker.  
There is a cavity within the voice coil and between the diaphragm membrane and the  
top of the pole piece. A fluid flow passage is provide to permit air displaced to and  
10       from the cavity during movment of the diaphragm assembly to flow through the top  
plate and to encourage cooling of the assembly.

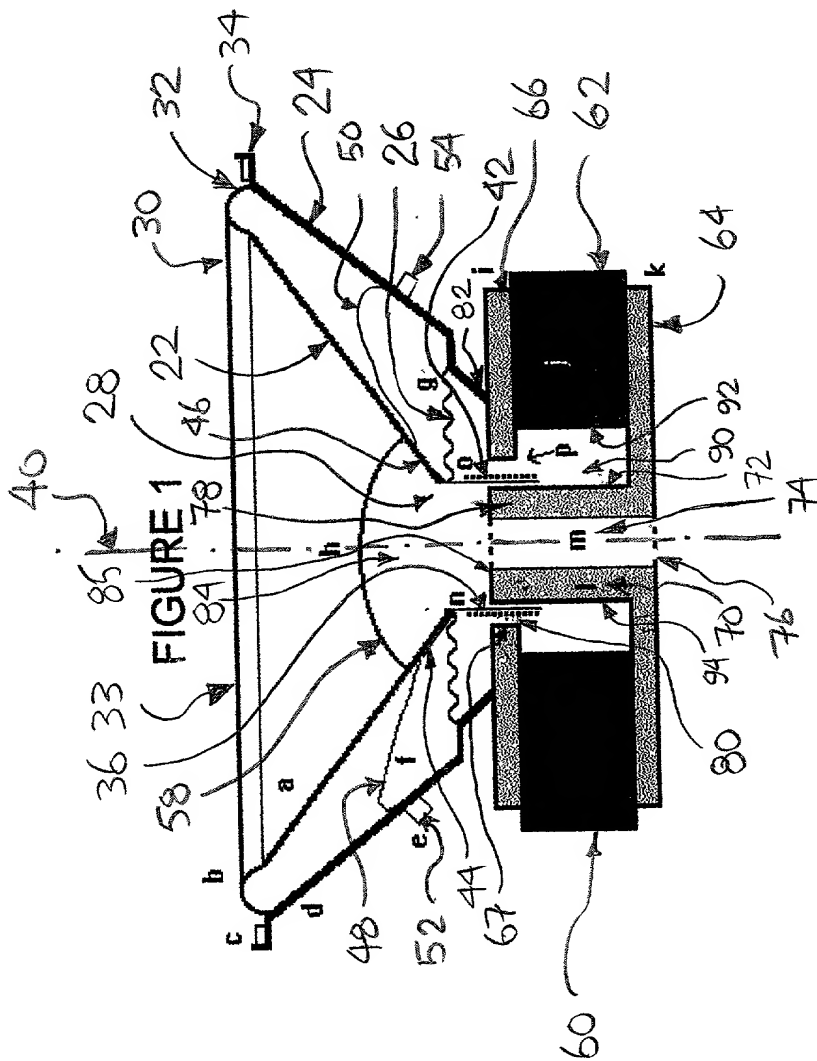

- |  |                              |
|--|------------------------------|
| a) cone, diaphragm                       | i) top plate                 |
| b) surround, upper suspension            | j) magnet                    |
| c) gasket                                | k) back plate                |
| d) basket, frame, housing                | l) pole piece                |
| e) terminal                              | m) vent                      |
| f) tinset lead, flex lead, lead in wires | n) voice coil former, bobbin |
| g) spider, lower suspension, damper      | o) voice coil                |
| h) dust cap                              | p) gap                       |



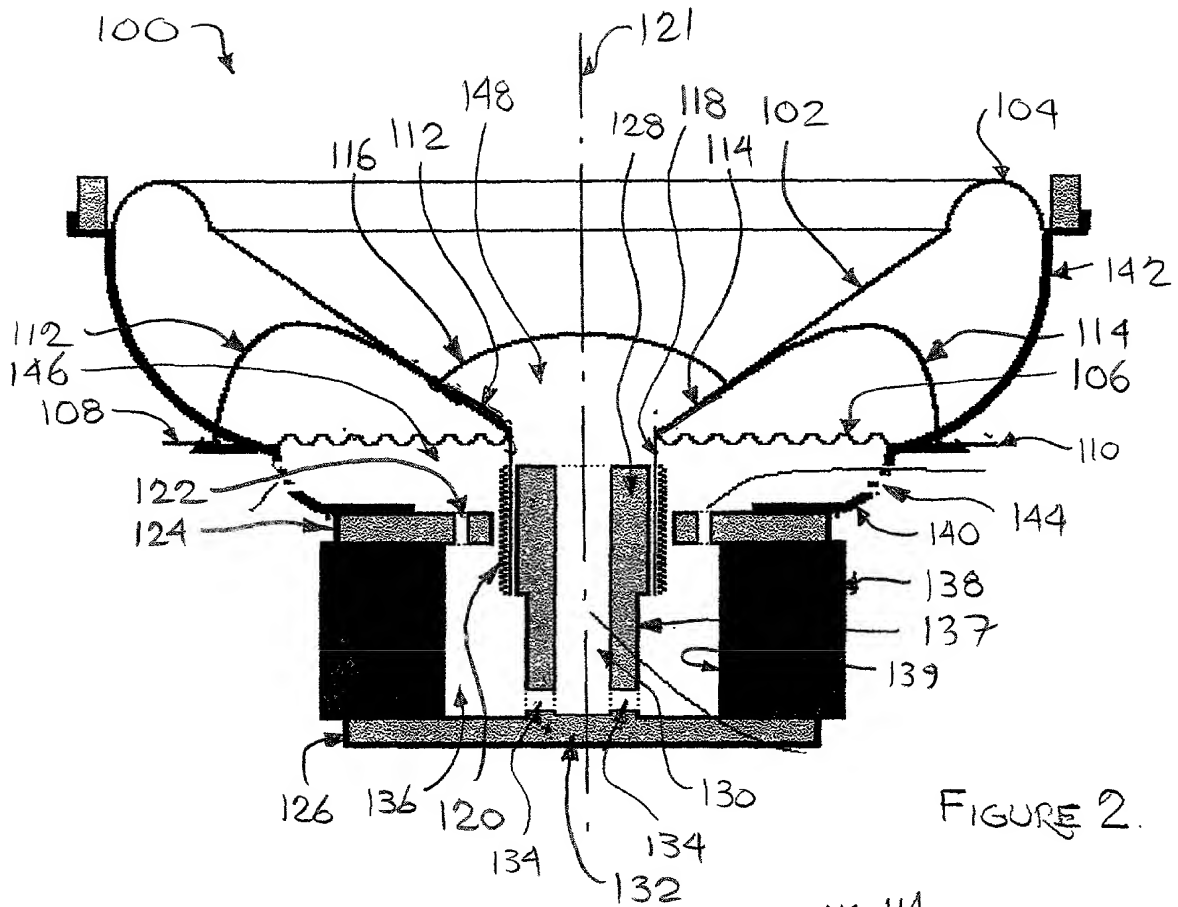


FIGURE 2.

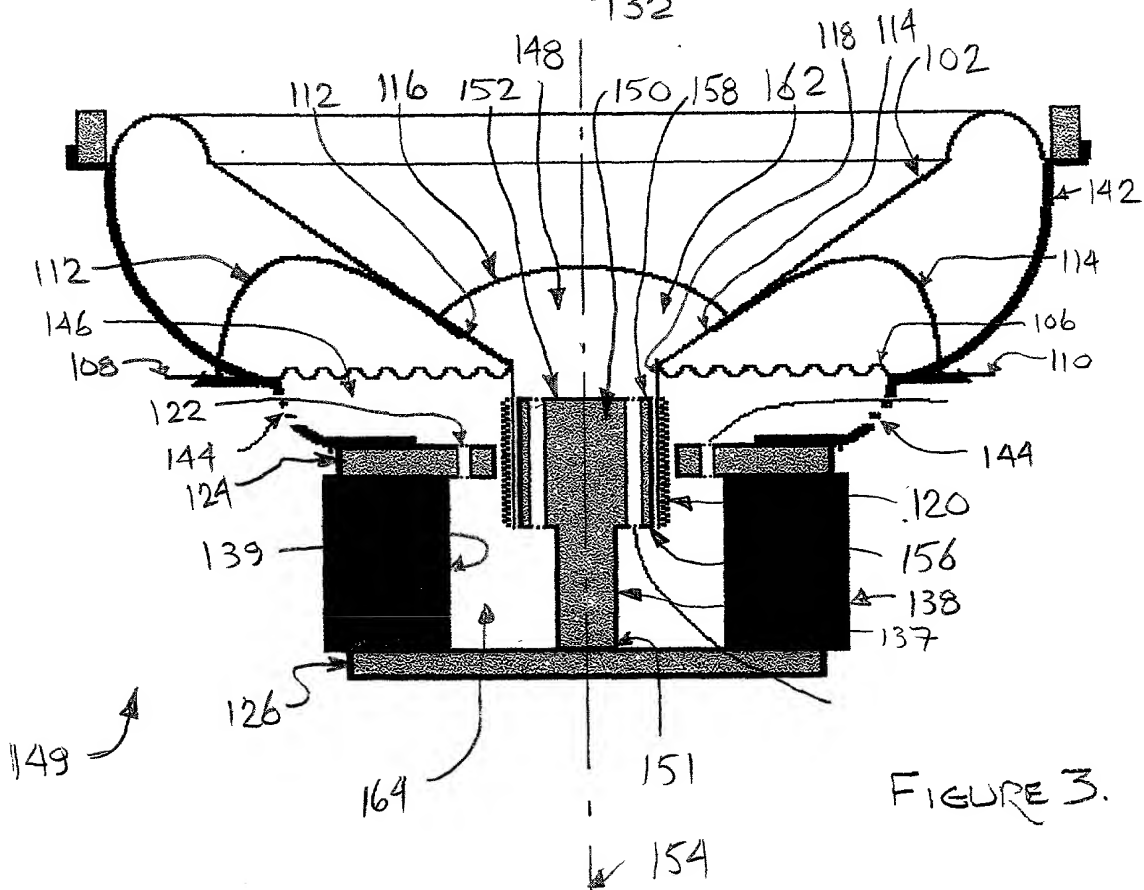


FIGURE 3.

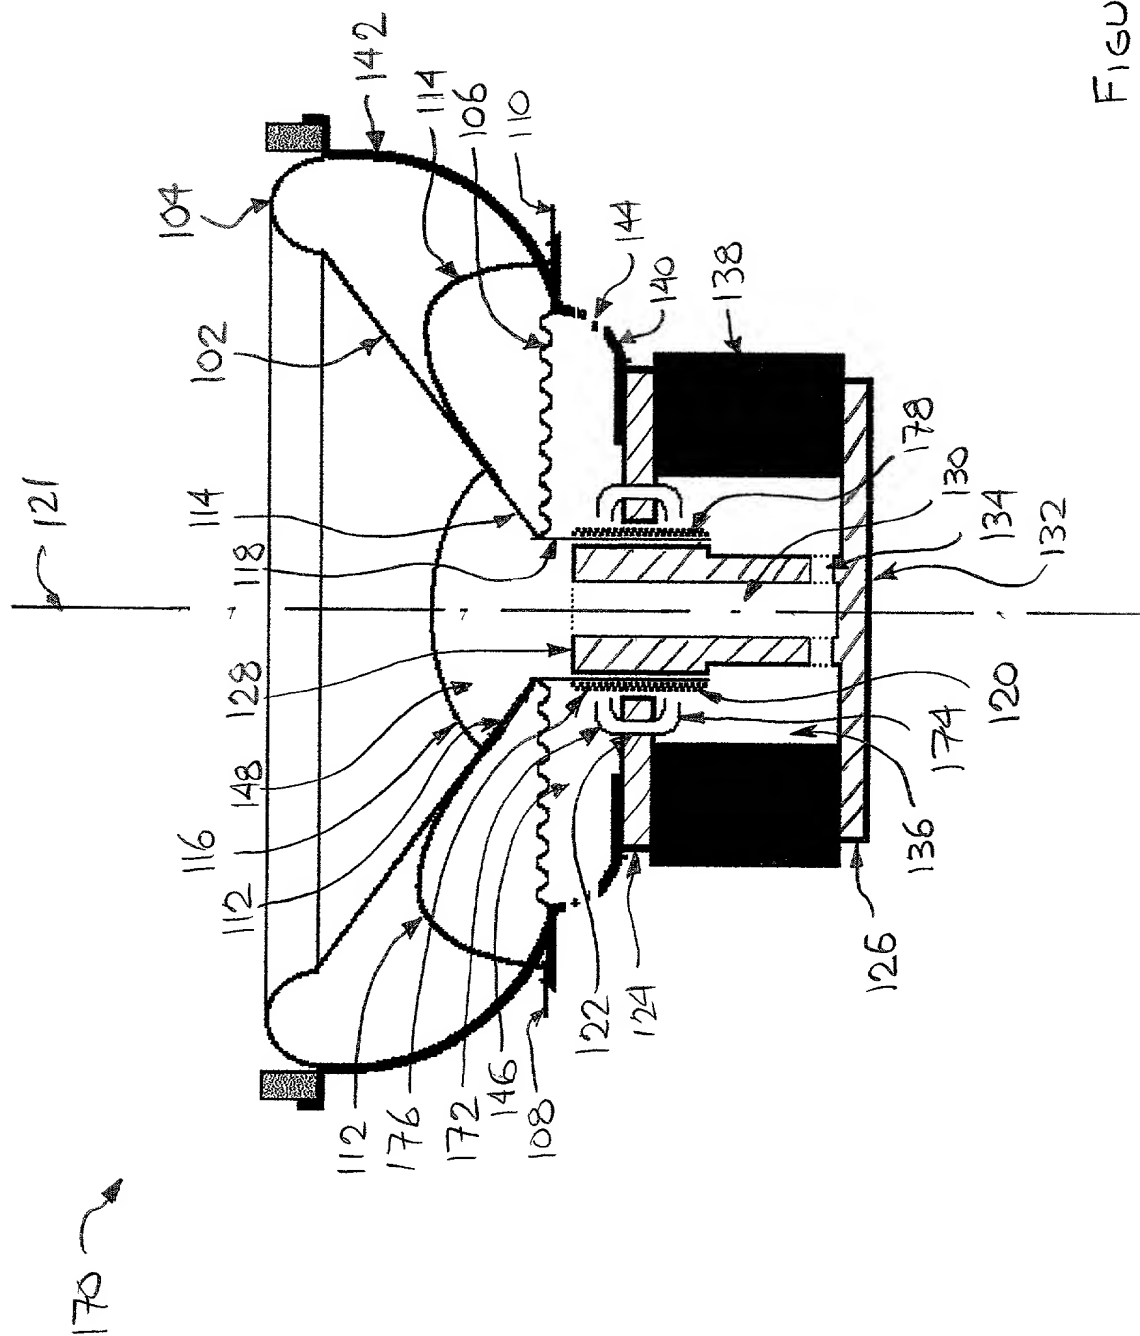


FIGURE 4a.

660640 40720660

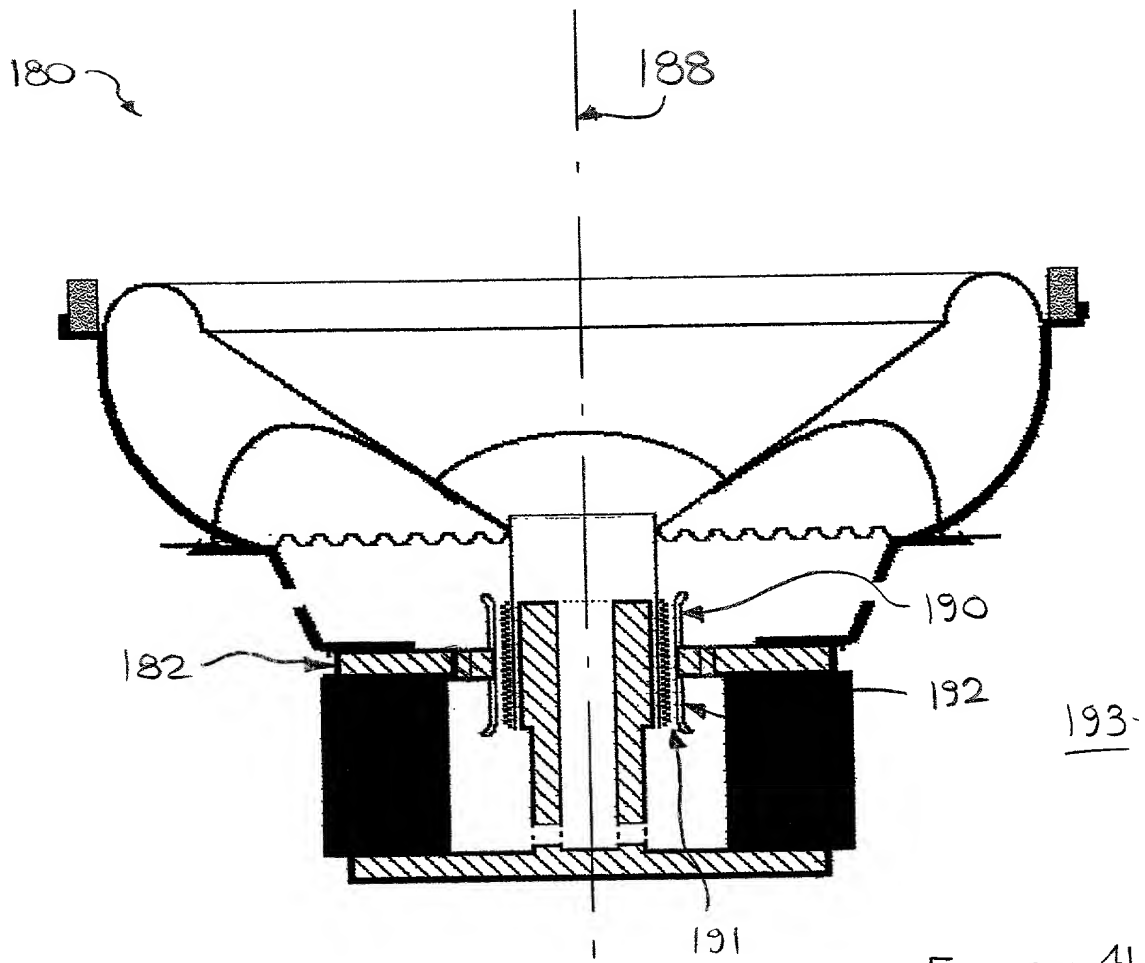


FIGURE 4b.

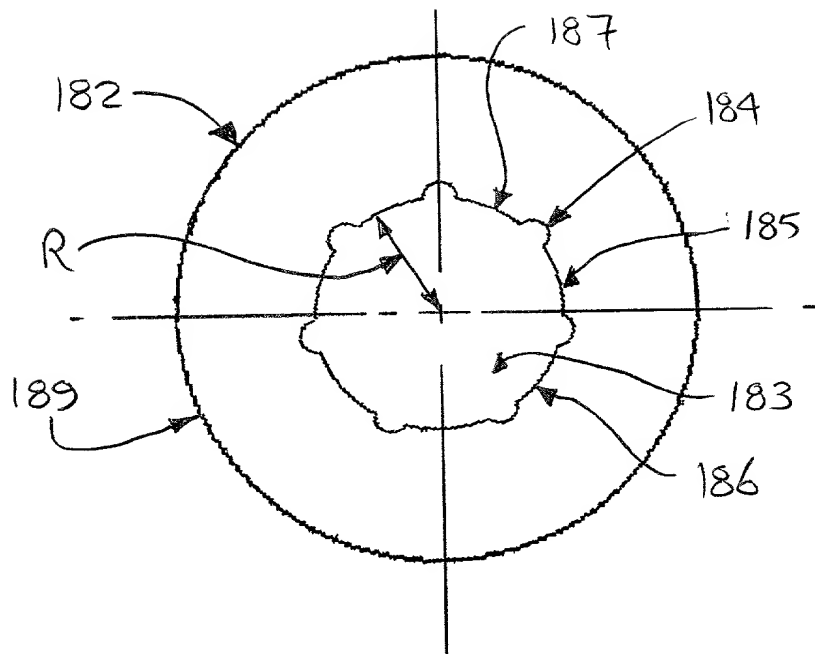


FIGURE 4c.

650570 20120600

200

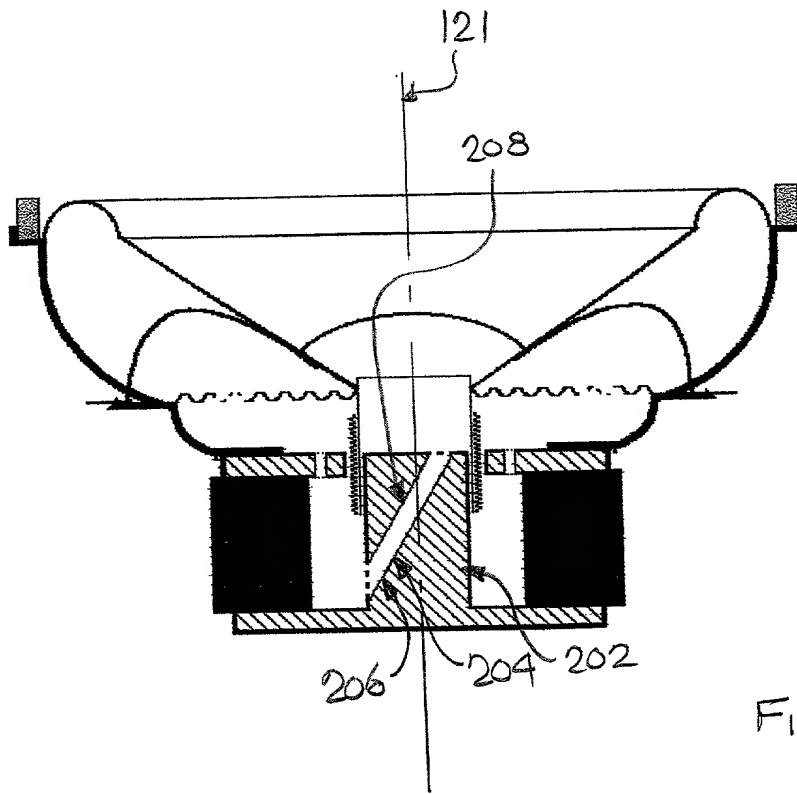


FIGURE 5a.

210

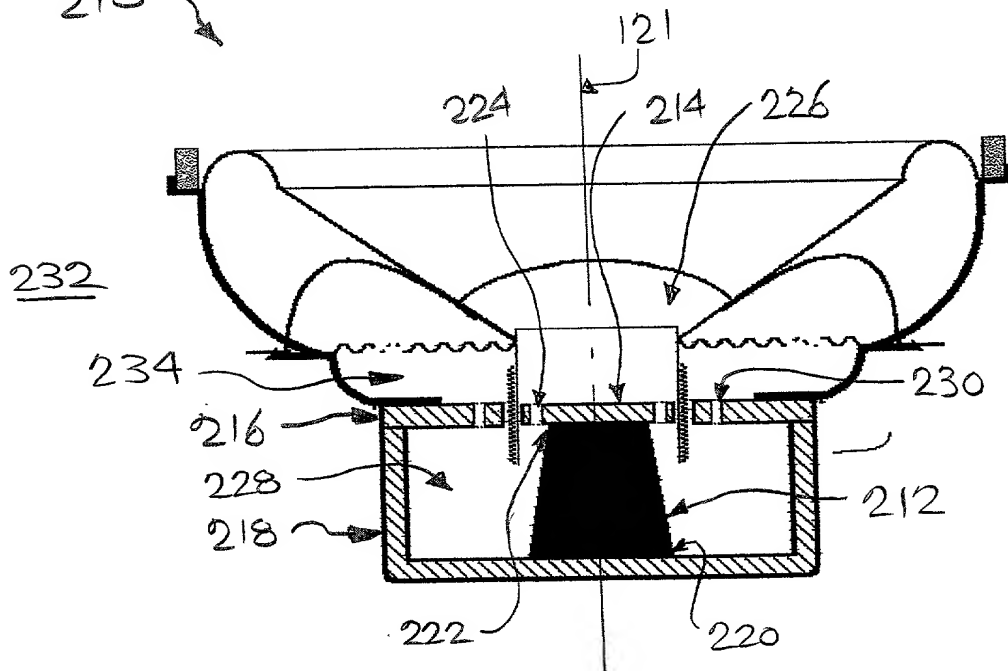
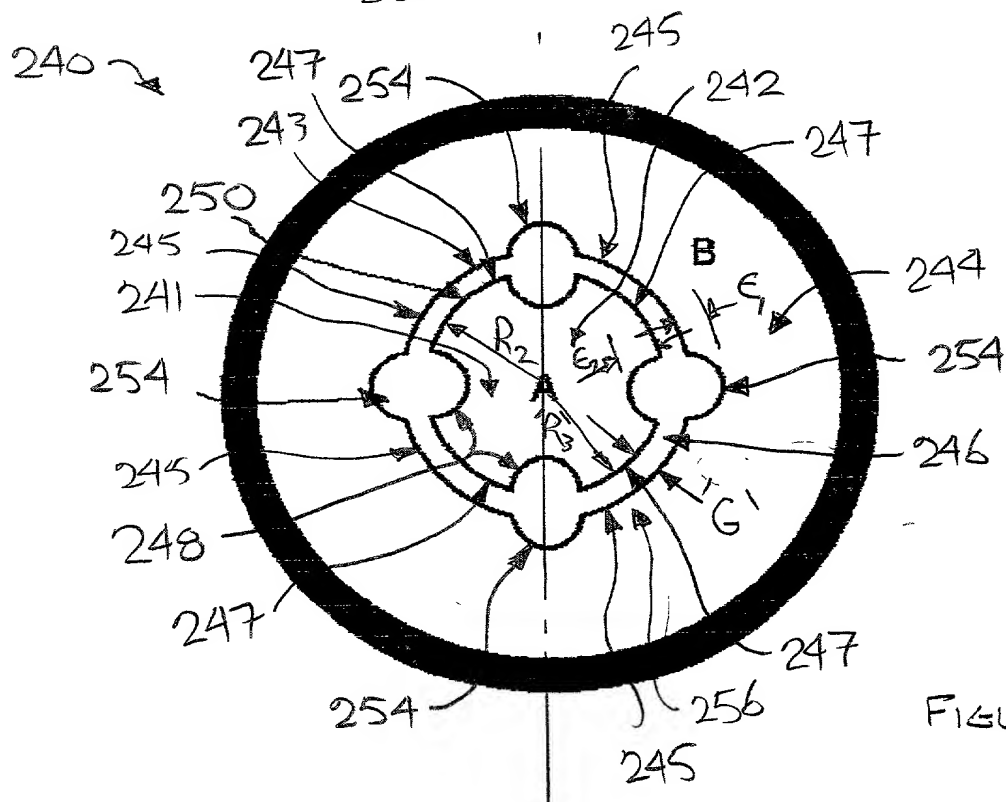
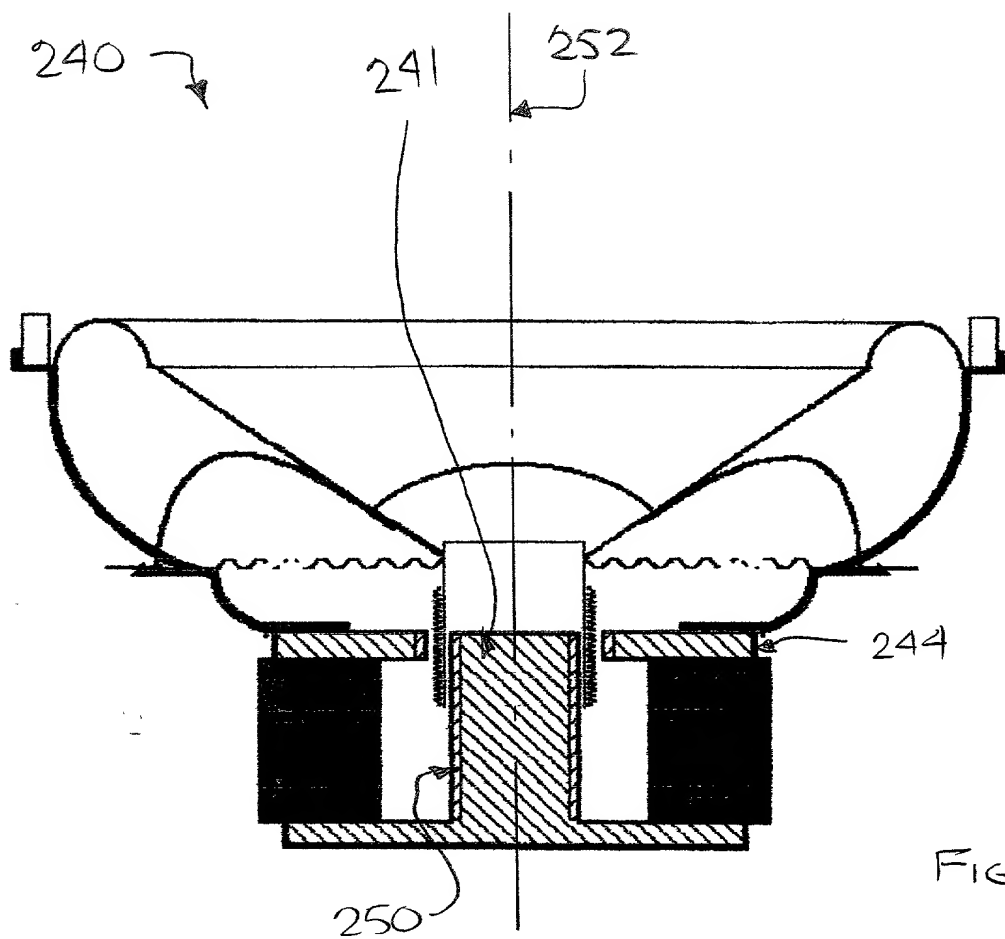


FIGURE 5b.



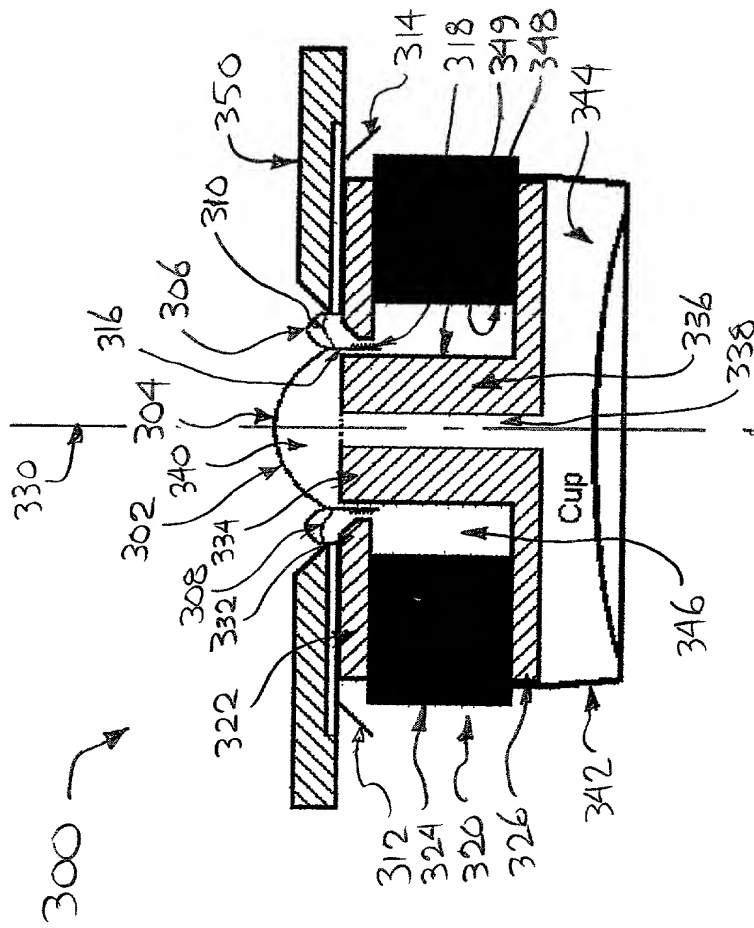


FIGURE 7

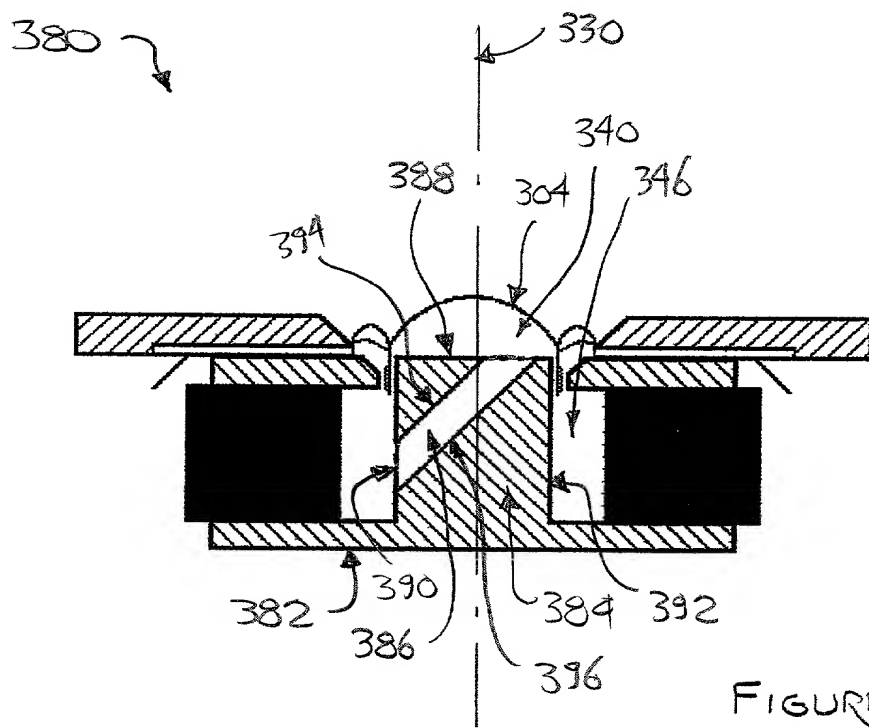


FIGURE 8a.

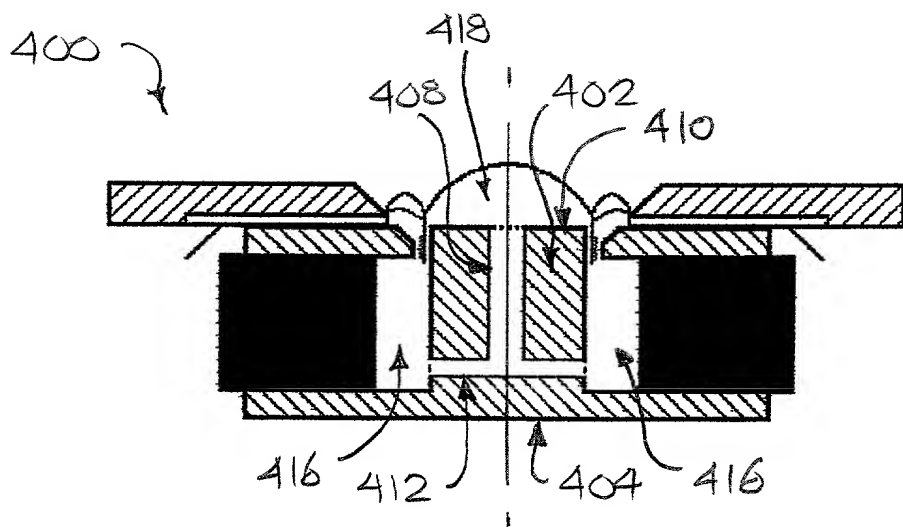


FIGURE 8b.

**DECLARATION**  
**Utility Application**

DOCKET INFORMATION  
57472/3

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **LOUDSPEAKER**, the specification of which

- ☒ **Check One**  
is attached hereto.
- ☐ was filed on \_\_\_\_\_ as  
Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Application Number	Country	Date of Filing	Priority Claimed	
			Yes✓	No✓
2,245,351	Canada	September 8, 1998	✓	
Not Yet Known	Canada	Not Yet Known	✓	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

Application Number	Date of Filing	Status — Patented, Pending or Abandoned



202	FULL NAME OF INVENTOR	FIRST NAME	Middle Initial(s)	Last Name	
	RESIDENCE & CITIZENSHIP	CITY	State or Foreign Country	Country of Citizenship	
	POST OFFICE ADDRESS	Post Office Address	City	State or Country	Zip Code

203	FULL NAME OF INVENTOR	FIRST NAME	Middle Initial(s)	Last Name	
	RESIDENCE & CITIZENSHIP	CITY	State or Foreign Country	Country of Citizenship	
	POST OFFICE ADDRESS	Post Office Address	City	State or Country	Zip Code

204	FULL NAME OF INVENTOR	FIRST NAME	Middle Initial(s)	Last Name	
	RESIDENCE & CITIZENSHIP	CITY	State or Foreign Country	Country of Citizenship	
	POST OFFICE ADDRESS	Post Office Address	City	State or Country	Zip Code

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 203
Date

Signature of Inventor <b>204</b>
Date

Signatures should conform to names as presented at 201 *et seq.* above.

**POWER OF ATTORNEY**

DOCKET INFORMATION  
57472/3

The Canadian Loudspeaker Corporation, owner of the application for United States Letters of Patent for **LOUDSPEAKER** (Title)

by Frank W. Fabian

(Inventor)

☒ executed on even date herewith or  
☐ having Serial No. \_\_\_\_\_, filed \_\_\_\_\_,


do hereby appoint as attorneys of record with full power of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith do hereby appoint as attorneys of record with full power of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith Brian W. Gray (Registration No. 30,017); Sheldon Burshtein (Registration No. 32,851); John C. Hunt (Registration No. 36,424); Alfred A. Macchione (Registration No. 40,333); Kenneth L. Bousfield (Registration No. 40,460); Alexander Porat (Registration No. 43,372).

Send Correspondence to:

**Blake Cassels & Graydon  
Intellectual Property Group  
Box 25, Commerce Court West  
Toronto, Ontario, M5L 1A9  
Canada**

**Direct Telephone Calls to:  
Kenneth L. Bousfield  
(416) 863-3080**

I, the undersigned, declare that I am the (an) owner of the above-identified application or, if the owner is a corporation, partnership or other association, I am authorized to make this appointment on behalf of the owner and I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of Individual Owner	The Canadian Loudspeaker Corporation	
Post Office Address	1578 Eglinton Avenue West, Toronto, Ontario M6E 2G8	
Signature of Owner		Date APRIL 27, 1999

Full Name of Individual Owner		
Post Office Address		
Signature of Owner		Date